




The thickness of 2 mm

Ra > 80

Color: ● 2700K ● 3000K ○ 4000K ○ 5000K (**CREE**)
 ● 3000K ● 4000K ○ 6000K (**EPISTAR**)
 ● 3000K ● 5000K (**CITIZEN**)

Beam Angle:30°/60°
 Base:MR16/GU10/GU5.3/E27



Model	Voltage	Lumens	Power	LED type	Size	Dimmable
RAV401-SPC103	AC110-265V	380-420lm	4.5W	EPISTAR	φ50X62	No
RAV401-SPC103	AC/DC12V	380-420lm	4.5W	EPISTAR	φ50X62	No
RAV401-SPC104	AC110-265V	380-420lm	4.5W	CREE	φ50X62	No New design
RAV401-SPC104	AC/DC12V	380-420lm	4.5W	CREE	φ50X62	No New design
RAV501-SPC102	AC110-265V	470-520lm	5W	EPISTAR	φ50X85	Yes
RAV501-SPC102	AC/DC12V	470-520lm	5W	EPISTAR	φ50X85	No
RAV501-SPC103	AC110-265V	500-550lm	6W	CREE	φ50X85	Yes New design
RAV501-SPC103	AC/DC12V	500-550lm	6W	CREE	φ50X85	No New design

Ra > 80

Color: ● 2700K ● 3000K ○ 4000K ○ 5000K (**CREE**)
 ● 3000K ● 4000K ○ 6000K (**EPISTAR**)
 ● 3000K ● 5000K (**CITIZEN**)

Beam Angle:30°/60°
 Base:MR16/GU10/GU5.3/E27



Model	Voltage	Lumens	Power	LED type	Size	Dimmable
RAV701-SPC102	AC110-265V	580-630lm	7W	EPISTAR	φ50X105	Yes
RAV701-SPC103	AC110-265V	580-630lm	7W	EPISTAR	φ50X105	Yes New design
RAV701-SPC105	AC110-265V	580-630lm	7W	CREE	φ50X105	Yes New design
RAV701-SPC104	AC 12V	600-650lm	8W	CITIZEN	φ50X100	Yes
RAV701-SPC104	AC 12V	600-650lm	8W	EPISTAR	φ50X100	Yes






Beam Angle
30°/60°

EPISTAR

Model:RAV401-SPC103

Input Voltage: AC/DC 12V / AC 110V~265V 50/60Hz
Power Rating:4.5W
Lumens:380lm~420lm
Ra>80






New!

Beam Angle
30°/60°

CREE

Model:RAV401-SPC104

Input Voltage: AC/DC 12V / AC 110V~265V 50/60Hz
Power Rating:4.5W
Lumens:380lm~420lm
Ra>80






Beam Angle
30°/60°

EPISTAR

Model:RAV701-SPC102

Input Voltage: AC 110V~265V 50/60Hz
Power Rating: 7W
Lumens:580lm~630lm
Ra>80

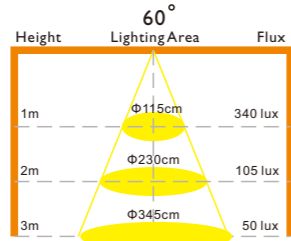




New!

Beam Angle
30°/60°

CREE

Model:RAV701-SPC105

Input Voltage: AC 110V~265V 50/60Hz
Power Rating: 7W
Lumens:580lm~630lm
Ra>80





Beam Angle
30°/60°

CITIZEN
Micro HumanTech

Model:RAV701-SPC104

Input Voltage: AC12V 50/60Hz
Power Rating: 8W
Lumens:600lm~650lm
Ra>80

EPISTAR



New!


PAR38 ∇ IP65

Beam Angle
120°

EPISTAR

Model:RAV1201-PAC1301

Input Voltage: AC 110V~265V 50/60Hz
Power Rating: 13W
Lumens:900lm~960lm
Ra>80

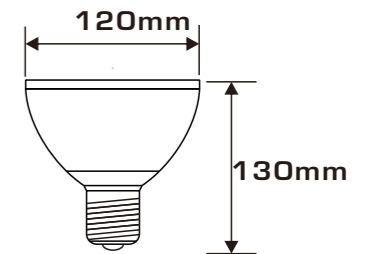



New!

Beam Angle
30°/60°

EPISTAR

Model:RAV901-SPC101

Input Voltage: AC 110V~265V 50/60Hz
Power Rating: 9W
Lumens:670lm~750lm
Ra>80



Beam Angle
30°/60°

CITIZEN
Micro HumanTech

CREE

Model:RAV1001-SPC101

Input Voltage: AC 110V~265V 50/60Hz
Power Rating: 10W
Lumens:700lm~850lm
Ra>80

