


S300B SERIES 150W,200W,250W,300W&350W

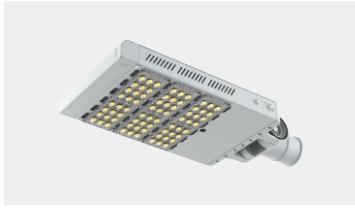

LED TECHNICAL DATA

- Typical Luminous Flux&Efficiency @350mA;
- 130lm@25°C
- Max Junction Temperature:
- 150°C
- Color Temperature:
- 3500K-6500K
- LED life Cyc
- 50,000 hrs.

LUMINAIRE TECHNICAL DATA

- LED light source
- 3 LED modules x 24pcs XTE CREE(150W)
- 4 LED modules x 24pcs XTE CREE(200W)
- 5 LED modules x 24pcs XTE CREE(250W)
- 6 LED modules x 24pcs XTE CREE(300W)
- 7 LED modules x 24pcs XTE CREE(350W)
- Luminous Flux:
- 150W-16500 lm
- 200W-22000 lm
- 250W-26500 lm
- 300W-33000 lm
- 350W-38500 lm
- Operating Temperature :
- -30°C~+45°C
- Power Driver:
- AC:100~295Vac 50/60Hz
- Classification :
- IP67 Class I
- Protection:
- Built-in external SPD
- Mounting Spigot
- Φ 61.5mm
- Nett Weight:
- 150W:5.9KG
- 200W:6.3KG
- 250W:6.7KG
- 300W:7.3KG
- 350W:8.0KG

COMPLIANCE STANDARD

- Driver:
- UL/CUL,CE,EN55015,EN61000,EN61457
- Luminaire:
- LM79,EN 60598-1,EN60598-2-3 ,
- EN62471,EN62493,EN61000-3,EN61547

APPLICATION

- Street/Roadway lightings
- Highway lighings
- Industrial lighting
- Commercial lighting


ORDER CODE

- TSL-S300B-150W
- TSL-S300B-200W
- TSL-S300B-250W
- TSL-S300B-300W
- TSL-S300B-350W


*Please indicate color temperature when ordering.

PHOTOMETRIC

200W LIGHT DISTRLBUTION CURVE




200W AVERAGE ILLUMINATION CURVE



DIMENSION

Code	No.of modules	L * W * H(mm)
S300B-150	3	674.5*304*128
S300B-200	4	766.5*304*128
S300B-250	5	858.5*304*128
S300B-300	6	950.5*304*128
S300B-350	7	1042.5*304*128

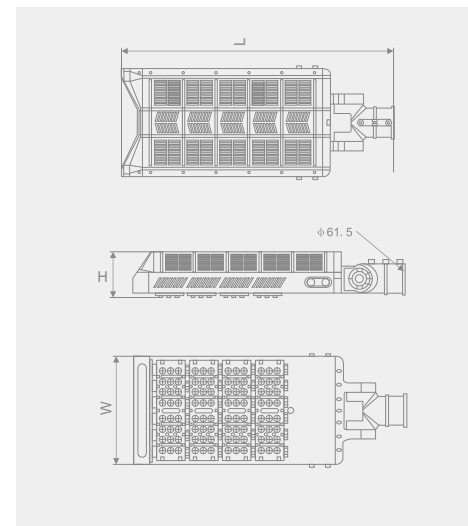

Note: Specifications are subject to change without prior notice.

